

12AL200N

12ALZ200N

AMARON QUANTA™


The industrial segment SMF-VRLA (Valve Regulated Lead Acid) battery for UPS applications is built to perform.

In short, the lifeline to your UPS applications

AMARON QUANTA™ is a product of fail- safe, fool-proof battery technology, produced and tested in our premier manufacturing facility. Built to the highest technical competence in its class, the QUANTA is an example of Amara Raja's commitment to bringing the best of technology to your table

It features several firsts for the battery industry like the unique Radgrid™




TERMINAL LAYOUT

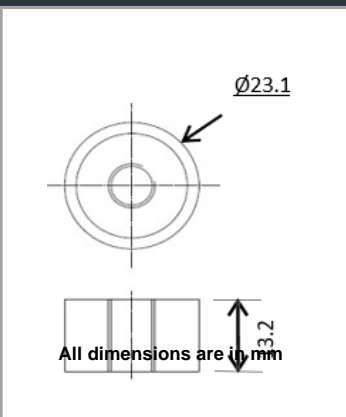

AMARON®
QUANTA
LIFE UNINTERRUPTED

Specification

Nominal Voltage	12V	
Rated Capacity	200Ah / C ₂₀ Hr / 1.75VPC / 27°C	
Dimensions (±2mm)	Length	541 mm (21.30 in.)
	Width	232 mm (9.31 in.)
	Total Height	238 mm (9.37 in.)
Weight (±5%)	61.0 Kg (134.48 lbs)	
Terminal Type	M8 x 25mm Copper terminal	
Capacity @ 27°C	186.00 Ah	(10hr, 18.60 A, 10.5 V/battery)
	171.50 Ah	(5hr, 34.30 A, 10.2 V/battery)
	126.60 Ah	(1hr, 126.6 A, 9.6V /battery)
	40°C (104°F)	110%
Capacity affected (Temperature at C20 hr rate)	27°C (80.6°F)	100%
	0°C (32°F)	80%
	-15°C (5°F)	60%
Case Material	Standard PPCP (12AL200N) FR Version UL 94 V0 (12ALZ200N)	
Internal Resistance (IR)	Approx. 3.49 mΩ for a fully charged battery (27°C)	
Short Circuit Current (As per IEC)	3655 A	
Operating Temp. range	-20°C to +60°C (50 to 60°C for shorter duration)	
Nominal Operating Temp. range	27°C ± 3°C	
Standby use (27°C)	Charging Voltage	13.5 V/battery
	Charging Current	Max. 25% of rated capacity
	Temp. Compensation	± 18mV/battery/°C
Cyclic use (27°C)	Charging Voltage	13.8 V/battery
	Charging Current	Max. 25% of rated capacity
	Temp. Compensation	± 30mV/battery/°C
Self-Discharge	< 4% per month at 27°C	



Constant Power Discharge Rating (Watts Per Battery) @ 27°C *

ECV/ Time	10min	15min	20min	30min	60min	2hrs	3hrs	5hrs	8hrs	10hrs	20hrs
1.60	4851	4183	3144	2675	1473	892	652	437	297	240	122
1.65	4766	4088	3112	2592	1448	881	634	427	292	238	121
1.70	4679	3992	3079	2508	1424	867	617	418	286	236	120
1.75	4476	3803	3021	2466	1381	853	599	408	280	234	119
1.80	4273	3614	2962	2422	1336	839	581	398	274	232	118

Constant Current Discharge Rating (Amperes) @ 27°C *

ECV/ Time	10min	15min	20 min	30min	60 min	2 hrs	3 hrs	5 hrs	8hrs	10 hrs	20 hrs
1.60	425.50	327.90	266.70	200.00	126.60	78.80	53.80	37.00	23.00	19.50	10.70
1.65	416.90	325.30	265.00	199.00	125.80	75.60	52.20	35.70	22.50	19.20	10.50
1.70	408.20	322.60	263.20	198.00	125.00	72.40	50.60	34.30	22.00	18.90	10.20
1.75	400.00	317.50	256.40	196.10	122.00	71.40	50.50	34.20	21.90	18.60	10.00
1.80	392.20	307.70	250.00	192.30	119.00	70.90	50.20	33.90	21.70	18.50	9.90

Note:

- The above data are average values per battery and can be obtained within five charge/discharge cycle
- A tolerance of ±5% is applicable for the above constant power discharge and constant current discharge values.
- Recommended to follow IEEE-485 Standard for Battery sizing (In terms of Aging Margin, Design Margin) for Optimal Performance & Life.
- Considerable Voltage drop across cables, if any shall be considering during battery sizing.

*Design improvement is a continuous process of Amara Raja. As a result, specifications are subject to change without prior notice

 **AMARA RAJA**
Gotta be a better way



CAUTION

- ⚠ Avoid short circuit
- ⚠ Don't charge in a sealed container



THE LONG LIFE UPS BATTERY



Performance

A clutch of design features ensures that AMARON QUANTA™

batteries perform predictably and reliably every time

- ✓ Proven AGM technology that ensures maintenance free characteristics
- ✓ A unique heavy duty corrosion-resistant alloy for positive grids to increase cyclic life in tropical
- ✓ Radgrid™ profile provides lower internal resistance and superior high-discharge performance
- ✓ Instacharge™ a patented paste recipe for excellent charge acceptance
- ✓ Low self-discharge rates for extended storage periods
- ✓ Design Float life of upto 10 years
- ✓ Clean and Sleek looks


Compliance

- ✓ JIS C 8702 Certified
- ✓ UL (UL-1989) & CE Certified
- ✓ Complies to IEC61056 & EUROBAT
- ✓ Complies to IS 16220
- ✓ Manufactured in ISO 9001, ISO 14001, ISO45001:2018 certified facilities


Applications

- ✓ Data Centers
- ✓ Banks & Financial Markets
- ✓ Network Operations Centers
- ✓ Industrial Process Control Facilities
- ✓ Safety, Surveillance & Security Systems
- ✓ Semiconductor Manufacturing
- ✓ Power Generation Plants
- ✓ Hospital & Testing laboratories


Discharge Characteristics

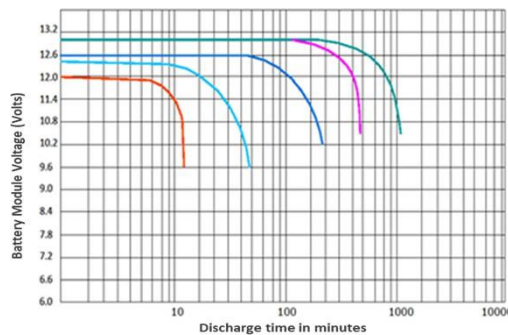


Temperature Effect on Capacity

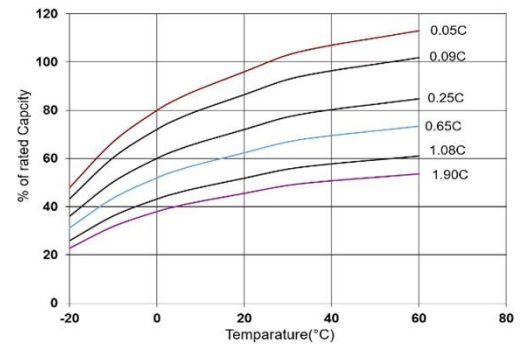

Shelf Life Characteristics

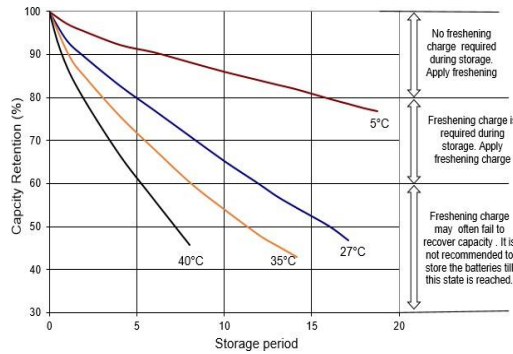

Float Service Life vs. Temperature

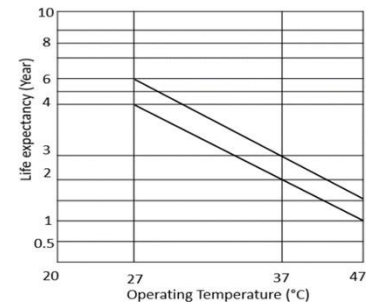

AMARA RAJA ENERGY & MOBILITY LIMITED

(Formerly Known as Amara Raja Batteries Limited)

CORPORATE OPERATIONS OFFICE:

Terminal A, 1-18/1/AMR/NR, Nanakramguda, Gachibowli, Hyderabad-500032, India,

Sales By M/s. Nishant Power Solutions Pvt. Ltd.

5-54 4B, High Street Corporate Centre,
Kapurbawadi, Thane (W) MS India 400601
Tel : +91 22 25404025 / Cell 9820843000

Email : sales@upsbatteries.co.in Visit at : www.upsbatteries.co.in

